ERGO-1 RANGE

INSTRUCTION OF USE

To adjust back height hold back with two hands while seated and raise to desired height

To lower the back height raise back all the way to the top and release slowly

RIGHT BACK LEVER

To adjust seat depth (seat slider)

RIGHT FRONT LEVER


To adjust seat height

RIGHT KNOB

To adjust weight tension

700MM ALUMINIUM 5 STAR BASE WITH CASTORS

Use soft tyred castors for tiles Use hard tyred castors for carpet

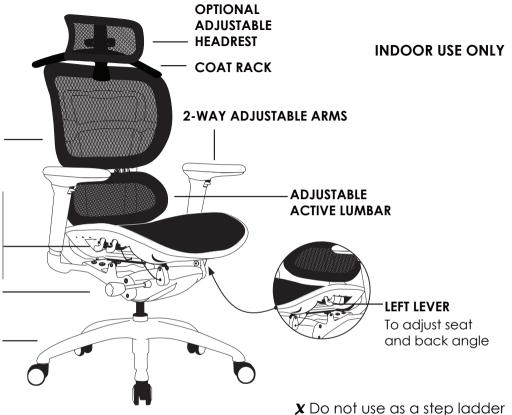

DIMENSIONS: (mm)

BACK TO FLOOR HEADREST TO FLOOR ARM TO FLOOR BACK **HEADREST** SEAT **SEAT TO FLOOR** Lowest: 1110 Lowest: 1245 Lowest: 500 Lowest: 660 W:530 W:300 W: 520 H: 640 Highest: 1190 H: 180 Highest: 1400 D: 500 Highest: 590 Highest: 820





Adjustable seat height cable controlled
Adjustable back height (ratchet)
Adjustable seat and back angle cable controlled
Adjustable seat depth (seat slider) cable controlled
Adjustable weight tension
Adjustable active lumbar

2-Way adjustable arms
Synchron mechanism with 3 locking positions
700mm aluminium 5 star base
Available in black only
BIFMA tested
Suitable for indoor use only